The power to get more done

Whirlpool® Freestanding Electric Range

WFE321LW

KEY FEATURES

- Steam Clean
- 5.3 cu. ft. Oven
- Eco-Friendly, Ceran® Cooktop
- One 12", Two 6" and One 8" Radiant Elements
- AccuBake® Temperature Management System
- Hidden Bake Element

STEAM Clean

Whirlpool® Home Appliances

Whirlpool® Freestanding Electric Range

WFE321LW

Model No.	WFE321LW
Capacity (cu. ft.)	5.3
Controls	Electronic
Cooktop	
Eco-Friendly, Ceran® Cooktop	Yes
12" Radiant Element	1
8" Radiant Element	1
6" Radiant Element	2
Burner/Element "On" Indicator Light	Yes
Hot Surface Indicator Light	Yes
Oven	
Steam Clean	Yes
Hidden Bake Element	Yes
Cooking System	AccuBake® Temperature Management System
Clock	Yes
Control Lockout	Yes
Delayed Cooking Option	Yes
Kitchen Timer	Yes
Oven Light Switch	Yes
Warm Hold	Yes
Broiler Location	Waist High
Oven Door	Extra-Large Window
Overall Features	
Storage Drawer	Yes

STEAM Clean

COLORS

White(Q) Black(B) Stainless Steel(S)

DIMENSIONS

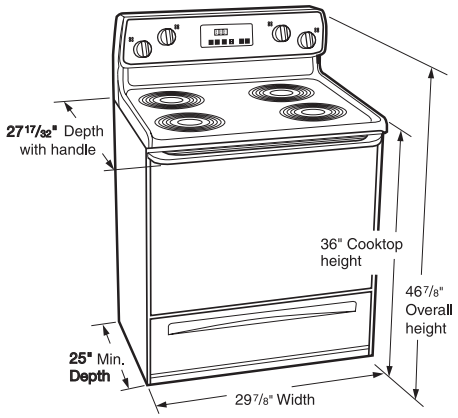

All dimensions are shown in inches.

CUT-OUT DIMENSIONS

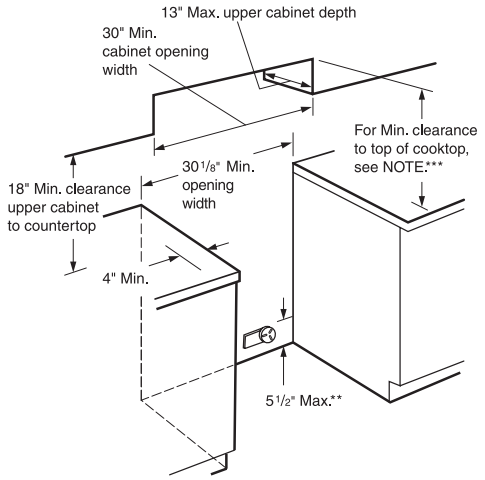
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 1/2" Max. from floor. Position receptacle as shown.

*** NOTE: 24" Min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" Min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

- Do not seal range to the side cabinets.
- If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.
- These are not flush-to-cabinet models.

®Registered trademark/™ Trademark of Whirlpool, U.S.A. ©2009. All rights reserved.